

COMMERCIAL

Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 48" Long 12-1/6 Pan



| FEM # |
|---------|
| 10DEL # |
| AME # |
| IS # |
| IA # |
| |

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- · Heavy duty Vinyl coated steel shelves.

Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 12 1/6 pans.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Optional Accessories

- shelf for 48" and 72" (left/right) PNC 880597 D mega top, salad and undercounter
- shelf clips PNC 880611 🗅

APPROVAL:

Part of

Electrolux Professional Group


Kelvinator Commercial www.kelvinatorcommercial.com




Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 48" Long 12-1/6 Pan



| Front | Electric | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Supply voltage: 738256 (KCHST48.12) Electrical power, max: Plug type: | 115 V/1 ph/60 Hz 0.7 kW USA NEMA 5-15P |
| | Capacity: | |
| | Gross capacity: | 12 cu.feet |
| Side | Key Information: | |
| | Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of grids (included): Type of external material: Type of internal material: Warranty: | 1 Left+1 Right 48 1/4" (1225 mm) 29 15/16" (760 mm) 43 3/16" (1097.5 mm) 2 Full 23 13/16" 23 1/2" 42 13/16" 47 1/4" (1200 mm) 335 lbs (152 kg) 42.88 ft ³ (1.21 m ³) Vinyl-Coated steel Stainless Steel 304 AISI 3 / 5 years |
| | Refrigeration Data | |
| | Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type: | 32 °F 41 °F Fin & tube Auto Defrost |
| | Sustainability | |
| | Current consumption: Refrigerant type: Refrigerant weight: | 7 Amps R290 90 g |
| Тор | | |

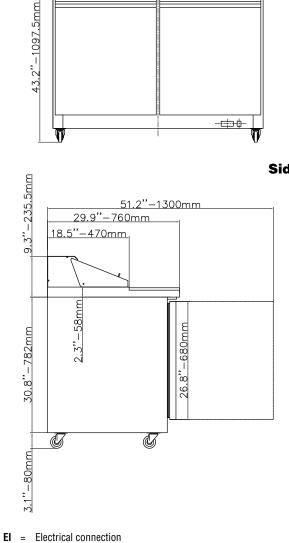

48.2''-1225mm 44.5"-<u>1130mm</u>



Intertek

Intertek

15A 125V NEMA 5-15P

Intertek

Refrigeration Equipment 2-Door Sandwich/Salad Prep Table 48" Long 12-1/6 Pan

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.